


SERLUX




STREET LIGHT

Urban lighting Elux series

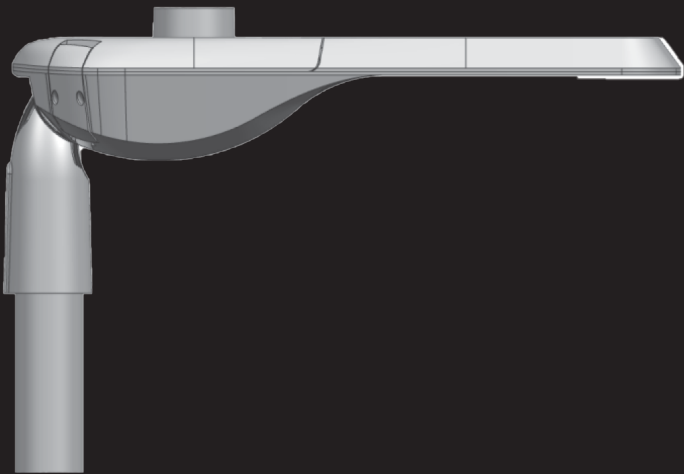

SERLUX

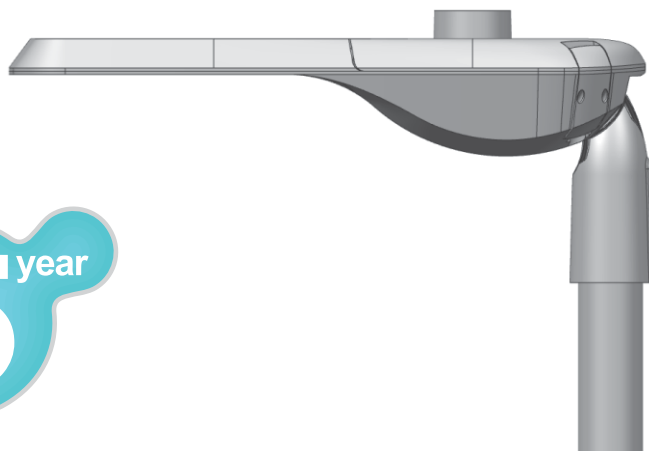

Product Description :

- Elux series luminaire is the ideal solution that fulfils requirements of functional street lighting and residential areas, which working with outstanding heat dissipation and compact system. Equipped with high-quality electrical components, long lifetime is assured. Tool-free design and disconnecter device, enables easy, safe and minimal cost for maintenance. Efficient system also to reduce energy consumption and to create a more attractive urban living environment and visual comforts for public and residential areas.
- With patented housing design and range of optics, Elux series luminaire is also a perfect choice for project oriented usage.


Features :

- Patented Ribbon-Free housing™ technology
- Excellent thermal management
- Outstanding self-cleaning capability
- Patented optics for increased application efficiency
- Tool-free maintenance

Application :

- Highway roads
- Streets
- Parking lots
- Residential areas

Specifications :

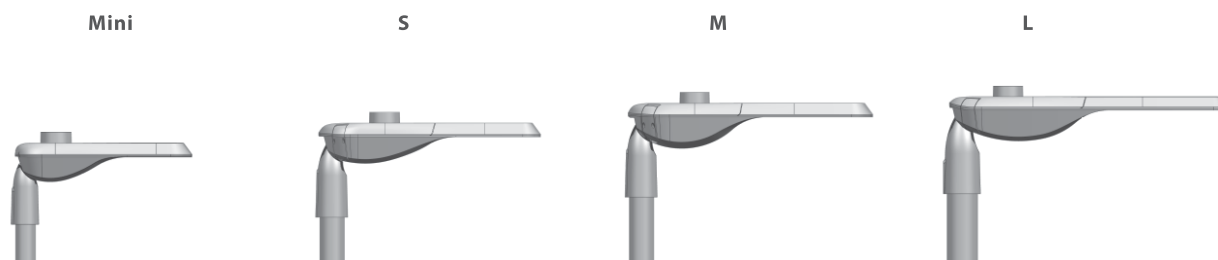


SERLUX

Model	Mini(Mini version) S(Small version) M(Medium version) L(Large version)
Light source	Integral LED Module
Power	30W/40W 50W/60W 80W/100W/120W 150W/180W/200W (Other power upon request)
Luminaire flux	1400-5500Lm(Mini version) 6500-7800Lm(Small version) 10000-16000Lm(Medium version) 19500-26000Lm(Large version)
Luminaire efficacy	110-140lm/W
CCT	4000K (3000K/5000K/5700K upon request)
CRI	> 70 > 80(upon request)
Lifetime	100,000 hours at 25°C ambient temperature
Operating temperature range	-30 to 45°C
Driver	Meanwell (Inventronics optional) Other brand of driver(upon request)
Electrical	Class I or Class II Input voltage: 90-305VAC/50-60Hz, 170-305VAC/50-60Hz 10KV/20KV SPD Power automatically switch off when opening
Dimming	Dali 1-10V PWM AstroDIM for autonomous dimming with five independent levels Smart control management system
Options	Photocell Surge protection device (up to 20KV) 0.5m External cable(Other length upon request) Smart control device Motion detection
Materials	Housing: ADC12 die-cast aluminum Cover: Toughened Glass Screws: 304 stainless screws
Color	Grey/ Black/ white
Tightness level	IP66
Impact Resistance	IK09
Standards & Certifications	CE ENEC CB GS IEC ROHS LM80 LM79 TM21


Luminous Intensity Distribution Diagram

The Elux series LED street light luminaire come with a robust optic compartment design, enable many different combinations of LED chipset and optic lens modules, which will help customers to always cope with the latest development of efficiency of led by using different type of led package, from 3030, 3535 to 5050.


Option 1: with 3535 LED package, basically the Elux could offer 6 standard light distribution curves as following

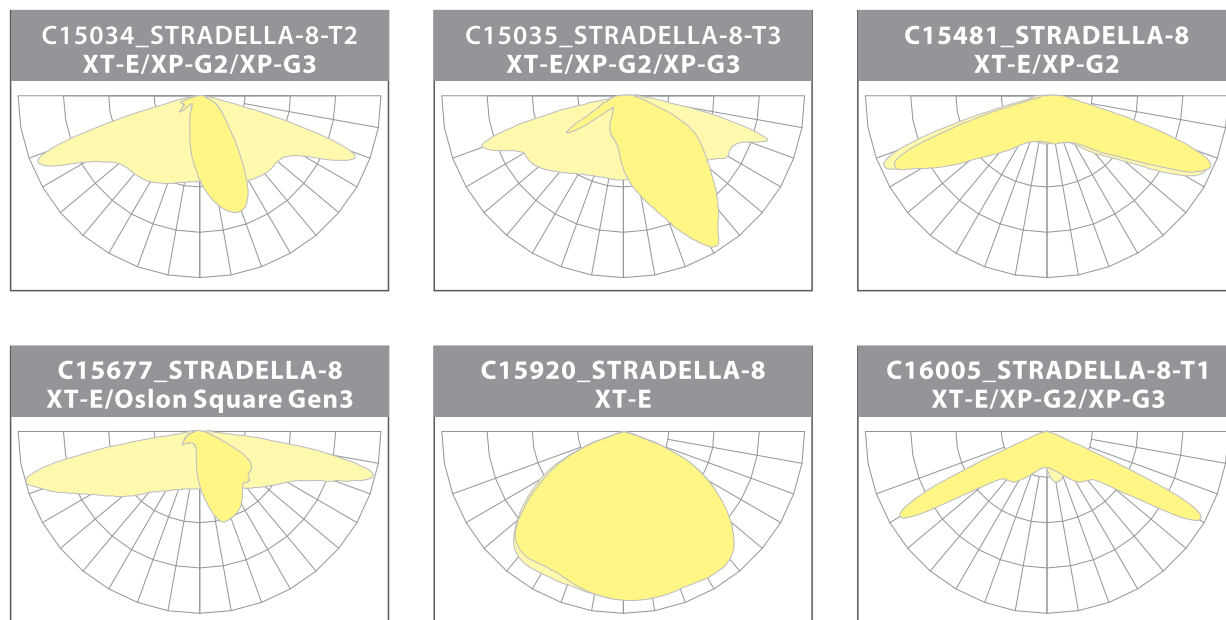


Option 2: with 5050 LED package, basically the Elux could offer 18 standard light distribution curves as following

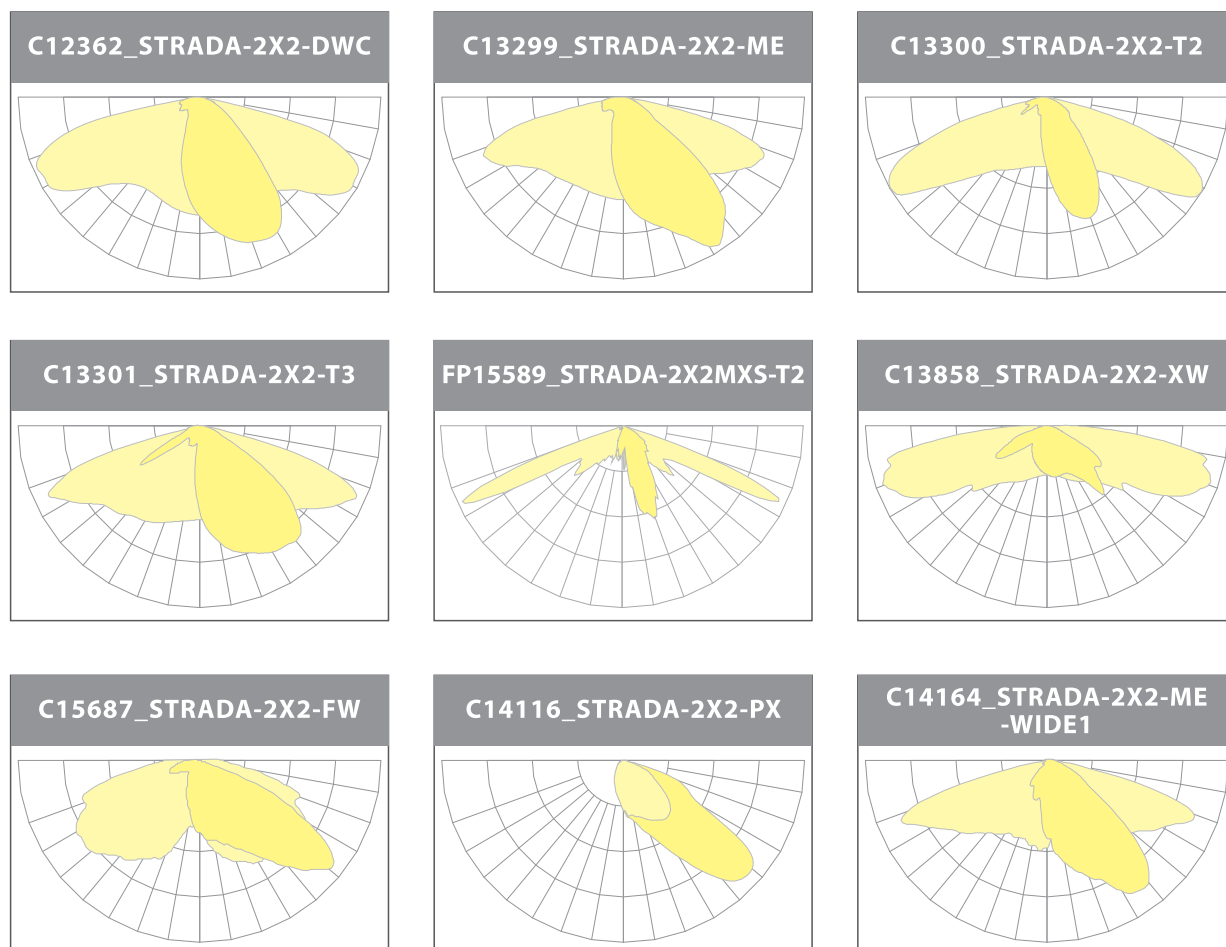


**C14165_STRADA-2X2-ME
-WIDE2**

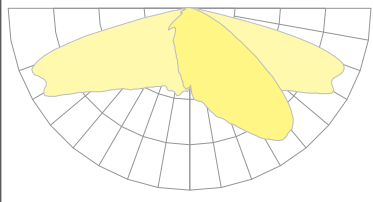

C14680_STRADA-2X2-VSM

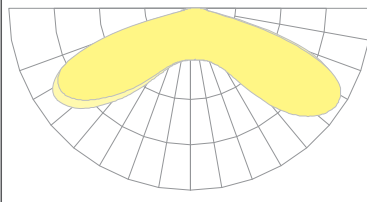


C14750_STRADA-2X2-CAT

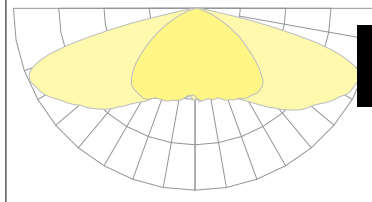


SERLUX


C14896_STRADA-2X2-PXL

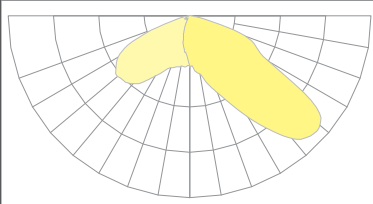


C15014_STRADA-2X2-T4

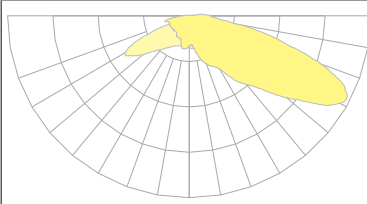


C15021_STRADA-2X2-SCL

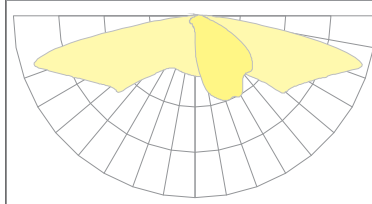


C15135_STRADA-2X2-T1

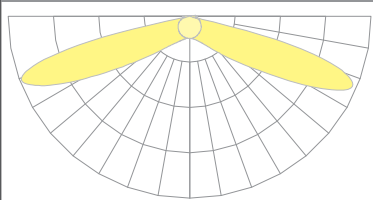

C15217_STRADA-2X2-CAT-B

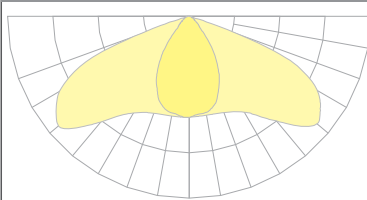


C15594_STRADA-2X2-MEW

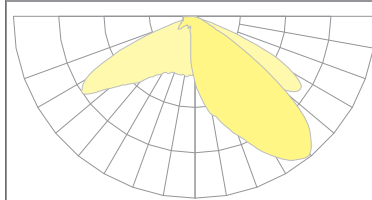


Option 3: with 3030 LED package, basically the Elux could offer 6 standard light distribution curves as following


155-70 Type II Medium

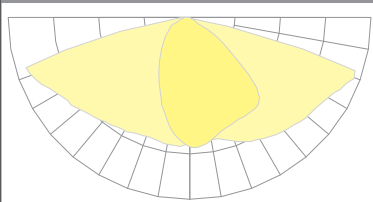


150-80 Type III Medium

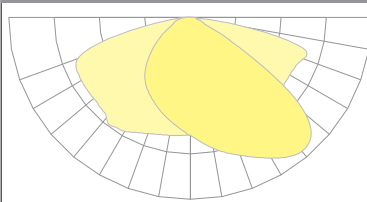


150-75 Type II Short

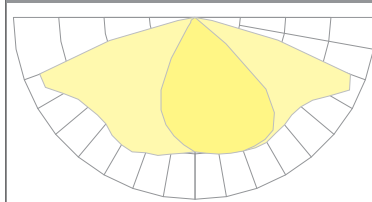


145-60 Type III Short

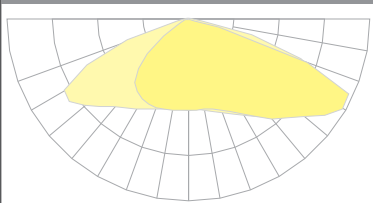

155-45 Type II Medium

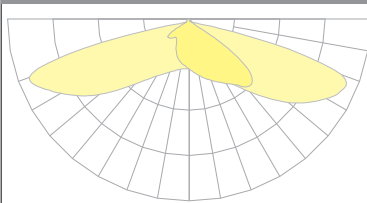


155-60 Type III Medium

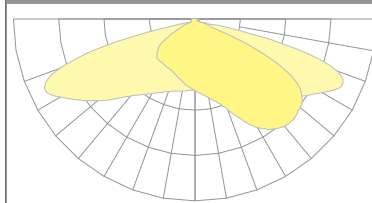

Unique features of Elux LED street light luminaire Mini version

SERLUX



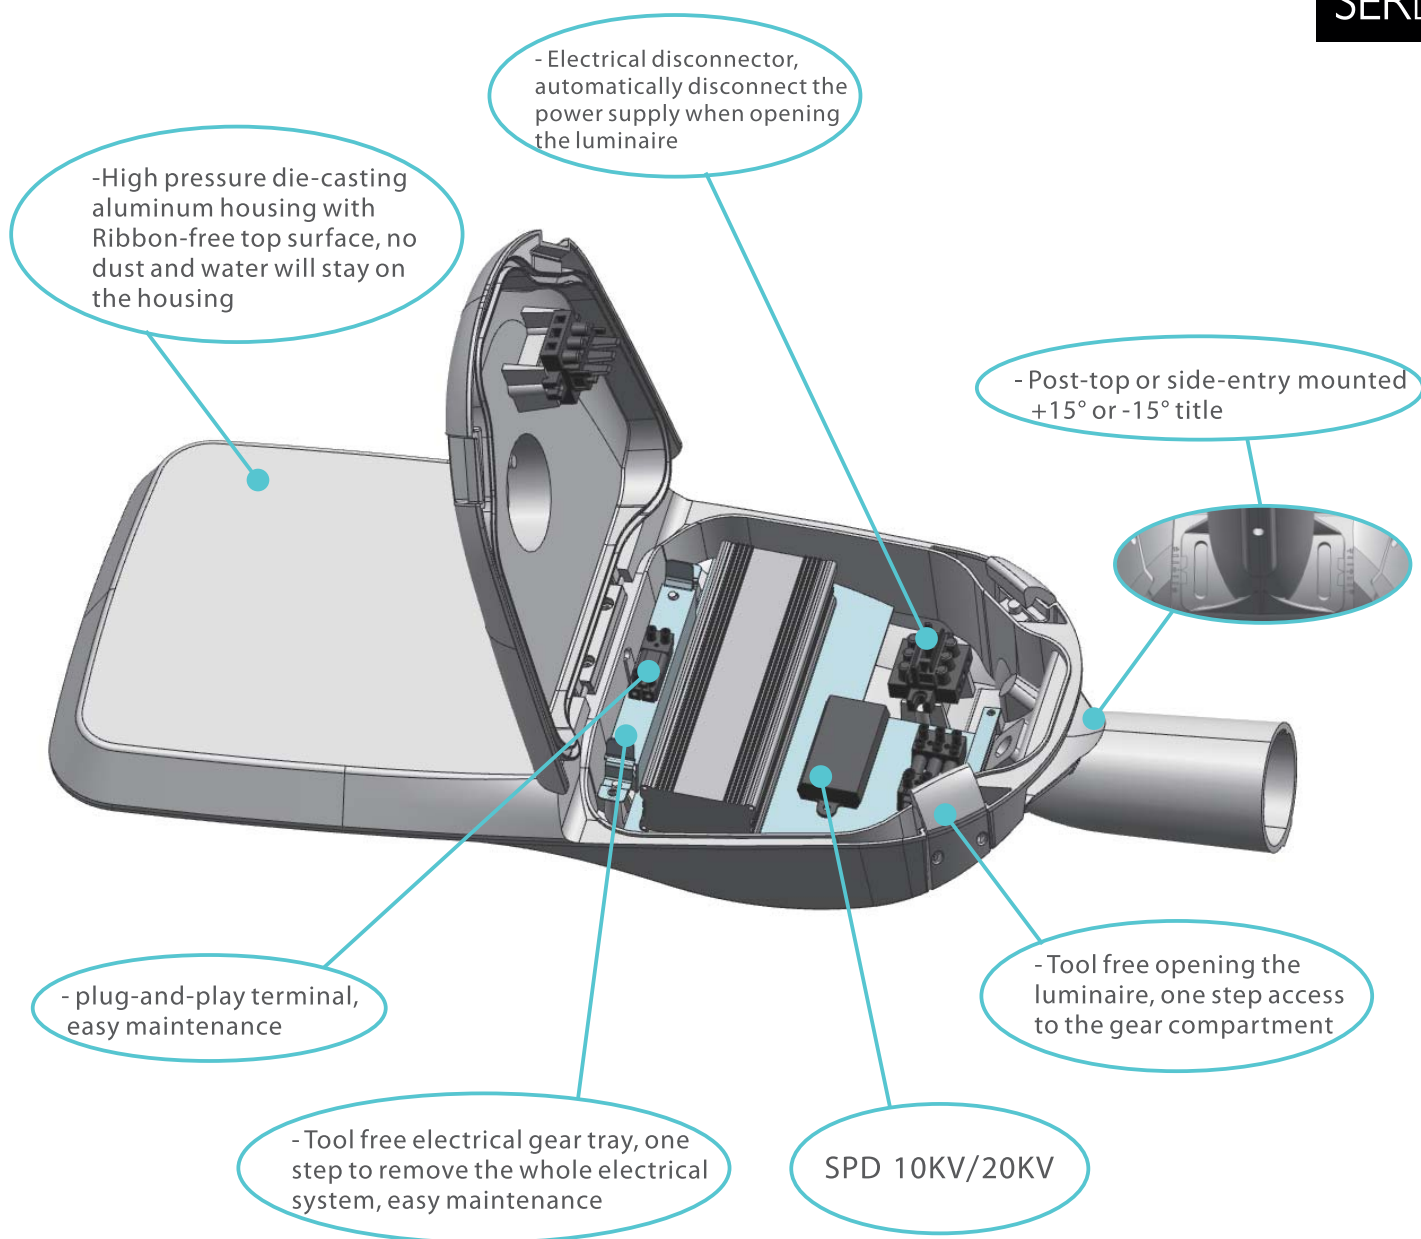

Pictures:

SERLUX




Internal structure



Internal structure







Photocell (optional)

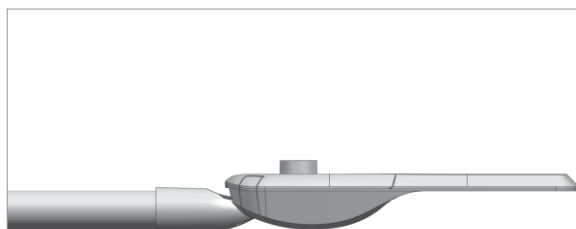





Horizontal Installation

Product size:

Horizontal Installation

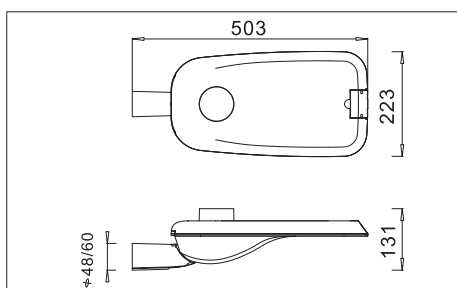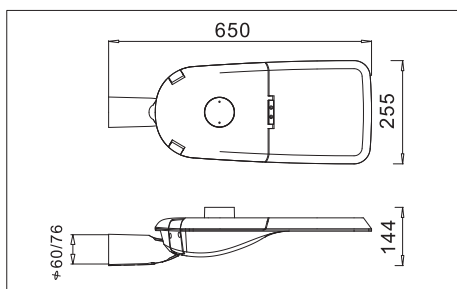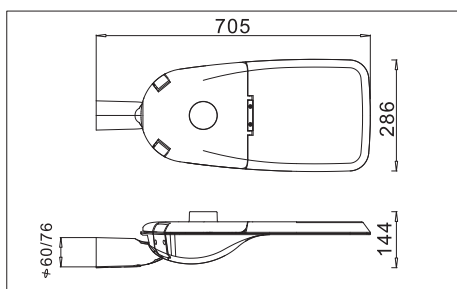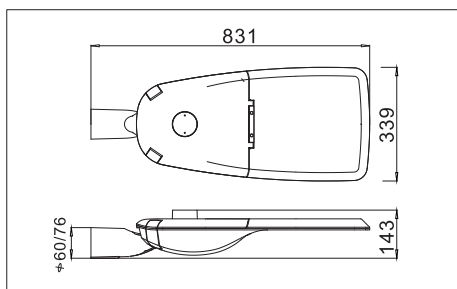


Vertical Installation

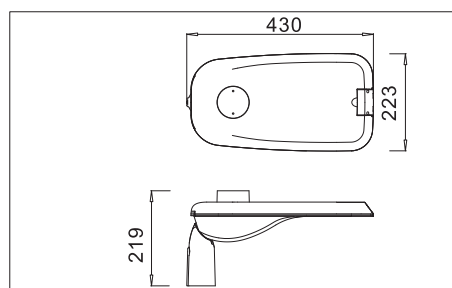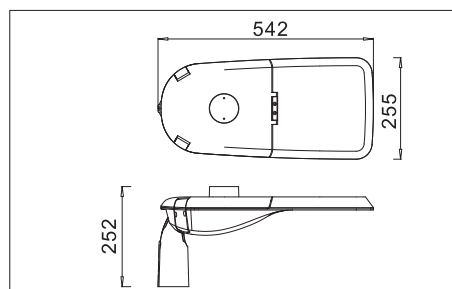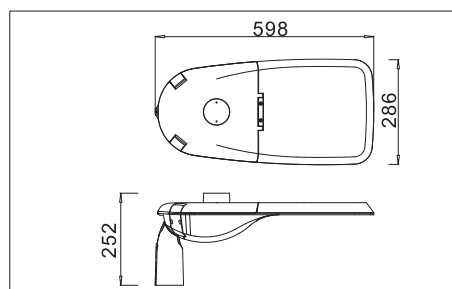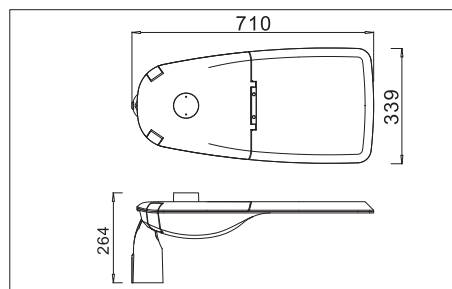

SERLUX

Installation:

- The Elux luminaire can either be post-top or side-entry mounted.
- The Elux luminaires are fitted with an adjustable inclination system to facilitate photometric adjustments on-site for optimal photometric performance.
- 3 installation pipe diameters are available, 48/60/76mm.
- Please look at the following information to finish installation.

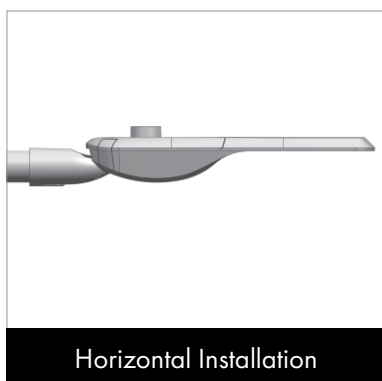

Horizontal Installation



Vertical Installation



Adjustable inclination system

SERLUX

CARRASCO | CASA CENTRAL

Av. Italia 5672
2600 2028
092 792 893

PUNTA CARRETAS

Francisco Ros 2781
2711 7113
092 868 340

LAGOMAR

Av. Giannattasio KM 21.8
2698 5300
099 306 969

PUNTA DEL ESTE

Av. Italia esq. Patagonia
4249 5328
099 764 876